



AUDION Packaging Machines

Together we make the perfect package

Power Sealer Plus

**Validatable
Vacuum Impulse Sealer**




VAC PSR PLUS

**Equipped with:
Audion Touch Techware
V7.05**

**Technical
Specification Sheet**

Rev.00

General specifications				
Type of machine	Validatable vacuum impulse sealer			
Models	520	720	1020	1320
Machine dimensions WxDxH	613 x 510 x 257 mm	815 x 519 x 257 mm	1115 x 519 x 257 mm	1415 x 519 x 257 mm
Weight	42 kg	48 kg	52 kg	56 kg
Seal length	520 mm	720 mm	1020 mm	1320 mm
Seal width	8 mm			
Seal system	Bi-active seal, flat seal			
Control system	Audion Touch Techware Equipped with Audion Temperature Controller (ATC) + 7 inch touchscreen (ADC)			
Vacuum system	Vacuum ejector 11.3 m3/h			
Covering	Stainless steel			
Power supply	230 V – 1ph – 50/60Hz			
Power consumption	2500 W	3000 W	2600 W	2200 W
Pneumatic supply	0.6 MPa (min) – 1.0 MPa (max)			
Gas supply	Max. 0.1 MPa			
Noise level	≤ 85 (dB(A))			
Applicable standards	ISO 11607-2 / ISO/TS 16775 / EN 868-5 / DIN 58953-7			

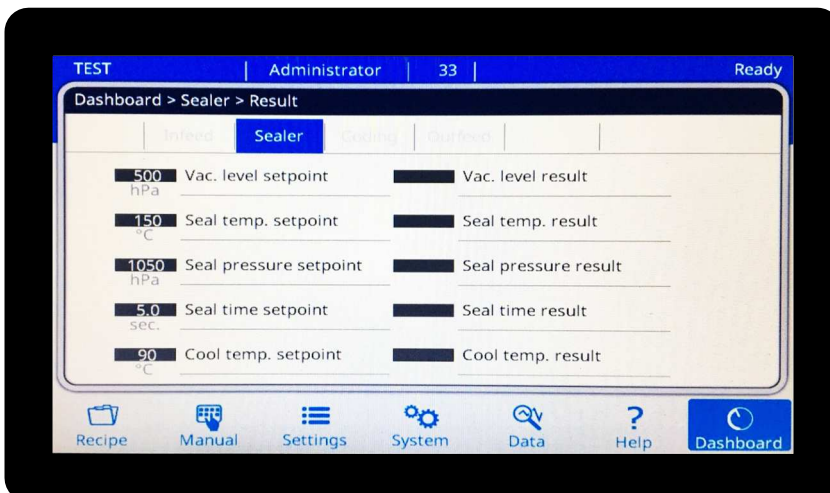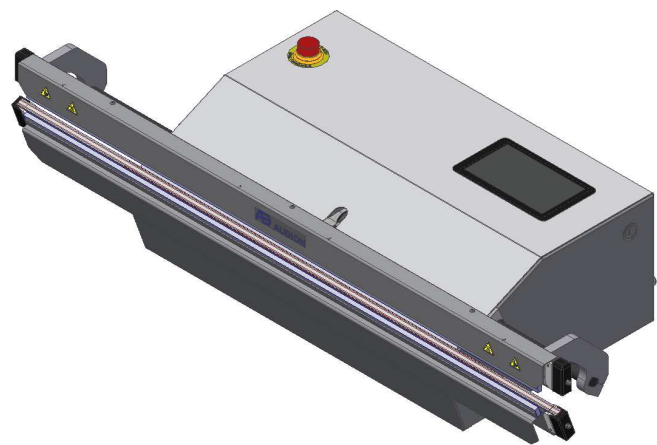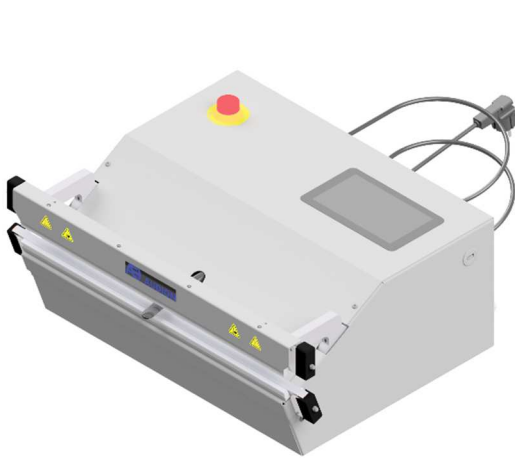

Technical specifications		
Recipe	Storage	50 recipes
	Recipe backup (.bin file through USB stick)	Copy recipe to USB Load recipe from USB
Process parameters	Vacuum time Setting range	0.1 – 120.0 sec.
	Gas flush time Setting range	0.1 – 120.0 sec.
	Seal temperature Setting range Tolerance range Accuracy	100 – 200 °C 0 – 20 °C (default 5 °C) +/- 3°C or +/- 2% (whichever is larger)
	Seal force Setting range Tolerance range	600 – 1500 N 0 – 150 N (default 100 N)
	Seal time Setting range	0.8 – 10.0 sec.
	Cooling temperature Setting range	50 – 150 °C
Adjustable parameters	Fine tuning for calibration	Seal temperature Seal force
Validation functions	Parameter monitoring (alarm stop)	Seal temperature Seal force Effective seal time Cooling time
	Data logging (.csv file through USB stick)	Machine ID Login level Recipe name Batch number Parameter settings Parameter tolerance Alarm limits Date/time Seal ID Parameters results Pass/fail Alarm code
System & functions	Login level	Operator Supervisor (password access) Administrator (password access)
	Language	English Netherlands German French Italian Japanese Czech
	Alarm history	Date/time Alarm code/descriptions
	Counter	Bag counter (resettable) Machine counter (non-resettable)

Options	Codes	Descriptions
Support	SP	Support in stainless steel 520 -1320
	SPM-CONF	Motorized support in stainless steel for 720 -1320
	PSR SPM WL EP	Wider legs to place the support legs around euro pallet Additional option for SPM-CONF
Bag support	BSP	Bag support in stainless steel for 520 -1320 Additional option for SP / SPM-CONF
	BSPM	Motorized bag support in stainless steel for 720 -1320 Additional option for SPM-CONF
Work table	WT	Work table in stainless steel, attached to frame
Roller Conveyor	RB	Roller conveyor in stainless steel for SP Not available for SPM-CONF
Sealing wire	TW	Twin seal 2 x 3 mm
	5MM SW	5 mm seal (instead of 8 mm)
Cutting	CD	Cutting device - effective cutting length: 520 model: 455 mm 720 model: 650 mm 1020 model: 950 mm 1320 model: 1245 mm
	CW	Cutting wire (5mm seal wire + 1mm cutting wire)
Nozzles	DNOZ	2 nozzles, standard length, 20mm width
	DNOZ LONG	2 nozzles, extra long (+45 mm)
	WNOZ	Wide vacuum nozzle (85 mm, standard on 1320)
	ENOZ	Extra long vacuum nozzle (1 nozzle, +45 mm)
	ANOZ	Adjustable nozzle in 2 positions (ENOZ included)
	BNOZ	Bayonet, quick release nozzle (1 nozzle)
	4NOZ	4 nozzles (only for 720 model)
Vacuum skip function	VSF	Finishes vacuum process when sensor setpoint is reached
Vacuum flow regulation	DVFR	Reduction valve for controlling vacuuming speed
Pump	HVP	20m3 Venturi pump
Filter	PF	Powder filter, density 80 microns
	QCS	Quick cleaning system for powder filter
	WS	Water separator (liquid filter)
External air exhaust	PSR EXH VENT	External air exhaust from Venturi pump
	PSR EXH VALVE	External air exhaust from pneumatics (valves and cylinders)
	PSR EXH COMPL	External air exhaust from Venturi and pneumatics (valves and cylinders)
Bag stretching	BST	Bag stretchers for 720 - 1320 models
	BST A WNOZ	Adjustment for BST in combination with WNOZ (wide nozzle)
Water cooled sealing bars	WCSB	Water cooled sealing bars
	CR	Coolant reservoir

Options	Codes	Descriptions
Foot pedal	PPF	Pneumatic foot operation
	370-05001-90	Electrical foot operation IP67
Start button	START	Start button on machine
	THS	Two hands start - start signal by pressing 2 buttons
Barcode scanner	BCSC	Barcode scanner Honeywell Voyager 1400G for quick recipe change
Labeller	LBL	Label printer CAB MACH for printing seal parameter results
Software options	MPE	Maximum permissible error (parameter uncertainty)
	SW-UA	User admin (access control with login ID and password)
	RNOZ MODE	Reversed nozzle mode (nozzle stays behind after a cycle)
Special construction	ESD	Electro-static discharge construction
	SILA	Silicone poor construction
Power supply	115V	115V - 1P - 50/60Hz version
	PCUK	Power cable for UK
	PCCH	Power cable for Switzerland
	PCUS	Power cable for USA / Japan
	PCCN	Power cable for China

Accessories / Services	Codes	Descriptions
Parameter verification	ATM	Seal temperature verification set
	AFMR	Seal force verification set
Calibration	KAL PSRPLUS AE	Audion factory calibration
	KAL PSRPLUS	Calibration by an accredited laboratory
IQ/OQ Check	IQ/OQ VAL	1 x IQ check for 1 machine > Operation training (max. 4 persons) > Maintenance training (max. 4 persons) OQ check for 1 type of bag > Peel test for defining seal temperature > Peel test with defined seal temperature > Dye penetration test > Seal check
	OQC	Extra OQ check for each extra bag
Seal integrity test	SIT	Seal integrity test service > Peel test > Dye penetration test > Seal check
	APT 100	Peel tester
	ASC SHEET	Seal check sheet
	ASC ROLL	Seal check sheet in roll
	ASC INK-B	Blue ink for dye penetration test

Data logging file

AUDION ELEKTRO LOG FILE									
Machine ID:	ETO19048								
Username:	APS								
Recipe:	TEST								
Batch:	ABC12345								
	Seal Time	Monitored eff. seal time	Seal Temp	Seal Force	Cool Temp	Monitored cool time			
	Setpoint	2	140	850	80				
	TOL		10	100					
	UAL		3.5	150	950	10			
	LAL			130	750				
Date&Time [YYYY-MM-DD hh:mm:ss]	Seal ID	Seal Time	Monitored eff. seal time	Seal Temp	Seal Force	Cool Temp	Monitored cool time	Pass/Fail	Alarm Code
2019/10/4 14:28	38	2	3.1	140	857.6	80	7.9	Pass	
2019/10/4 14:29	39	2	3.1	139.8	862.1	80	7.8	Pass	
2019/10/4 14:31	40	2	3.1	139.8	858	80	8	Pass	
2019/10/4 14:32	41	2	3.2	139.9	742.7	80	7.9	Fail	30

Measuring instruments for parameter verification

Seal temperature



ATM

- Measurement range: -50°C to 260°C
- Resolution: 0,1°C (up to 199,9°C) / 1 °C (above 200°C)
- Accuracy display unit: 0.3% of reading + 1°C
- Accuracy sensor: +/- 2,2 °C or +/- 0,3% of measurement (whichever is larger)
- Measuring rate: 2,5 per second
- Minimum and maximum values readable
- Operating conditions: +5 ... 50 °C, 30 – 70% RH (non-condensing)
- Power supply: 9V battery
- Battery life: +/- 100 hours
- Dimensions: 63 (W) x 186mm (L) x 40mm (D)
- Weight: 350 grams

Seal force



AFMR

- Measurement range: max. 2000 N
- Resolution: 0,1 N
- Accuracy class: 0,5 %
- Operating temperature range: -10 ... +50 °C
- Max. Overload: 120%
- Measuring rate: 50 per second
- Power supply: 3x AA batteries
- Battery life: +/- 40 hours
- Environmental protection: IP 54
- Dimensions: 82mm (W) x 162mm (L) x 54mm (D)
- Weight: 670 grams (excluding mounting tools)